



Non Radioactive GDT Tube 5KA SC2E5-600LSMD RoHS compliant

Our Product Introduction

Basic Information

- Place of Origin: Shenzhen, Guangdong, China
- Brand Name: SOCAY
- Certification: UL, REACH, RoHS, ISO
- Model Number: SC2E5-600LSMD
- Minimum Order Quantity: 1000PCS
- Price: Negotiable
- Delivery Time: 5-8 work days



Product Specification

- Product Name: Gas Discharge Tube
- Size: 5*5*4.2mm
- DC Spark-over Voltage @100V/ μ s: 600V $\pm$ 20%
- Max. Spark-over Impulse Voltage @100V/ μ s: 1100V
- Max. Spark-over Impulse Voltage @1KV/ μ s: 1200V
- Max. Capacitance: 1.0pF
- Nom.Max. Impulse Discharge Current Impulse Discharge Current: 5KA
- Highlight: Non Radioactive GDT Tube, RoHS GDT Tube



for more products please visit us on socaydiode.com

DATASHEET: [SC2E5-SMD v2110.1.pdf](#)

Part Number	DC Spark-over Voltage	Maximum Impulse Spark-over Voltage		Minimum Insulation Resistance	Maximum Capacitance	Arc Voltage	Service Life			
							Nominal Impulse Discharge Current	Max Impulse Discharge Current	Nominal Alternating Discharge Current	Impulse Life
	@100V/S	@100V/ μ s	@1KV/ μ s		@1MHz	@1A	@8/20 μ s $\pm$ 5 times	@8/20 μ s 1 time	@50Hz 1 Sec 10 times	@10/100 μ s 300 times
SC2E5-75LSMD	75V $\pm$ 20%	500V	650V	1 G Ω (at 50V DC)	1.0pF	~15V	5KA	10KA	5A	100A
SC2E5-90LSMD	90V $\pm$ 20%	500V	650V	1 G Ω (at 50V DC)	1.0pF	~15V	5KA	10KA	5A	100A
SC2E5-150LSMD	150V $\pm$ 20%	500V	650V	1 G Ω (at 50V DC)	1.0pF	~20V	5KA	10KA	5A	100A
SC2E5-200LSMD	200V $\pm$ 20%	500V	650V	1 G Ω (at 100V DC)	1.0pF	~20V	5KA	10KA	5A	100A
SC2E5-230LSMD	230V $\pm$ 20%	600V	700V	1 G Ω (at 100V DC)	1.0pF	~20V	5KA	10KA	5A	100A
SC2E5-300LSMD	300V $\pm$ 20%	700V	800V	1 G Ω (at 100V DC)	1.0pF	~20V	5KA	10KA	5A	100A
SC2E5-350LSMD	350V $\pm$ 20%	700V	800V	1 G Ω (at 100V DC)	1.0pF	~20V	5KA	10KA	5A	100A
SC2E5-420LSMD	420V $\pm$ 20%	800V	950V	1 G Ω (at 100V DC)	1.0pF	~20V	5KA	10KA	5A	100A
SC2E5-470LSMD	470V $\pm$ 20%	900V	1000V	1 G Ω (at 100V DC)	1.0pF	~20V	5KA	10KA	5A	100A
SC2E5-600LSMD	600V $\pm$ 20%	1100V	1200V	1 G Ω (at 100V DC)	1.0pF	~20V	5KA	10KA	5A	100A
SC2E5-800LSMD	800V $\pm$ 20%	1200V	1400V	1 G Ω (at 100V DC)	1.0pF	~20V	5KA	10KA	5A	100A

Notes:
Terms in accordance with ITU-T K.12 and GB/T 9043-2008
At delivery AQL 0.65 level , DIN ISO 2859



Description



Gas discharge Tubes (GDT) are classical components for protecting the installations of the telecommunications. It is essential that IT and telecommunications systems -with their high-grade but sensitive electronic circuits - be protected by arresters. They are thus fitted at the input of the power supply system together with varistors and at the connection points to telecommunication lines. They have become equally indispensable for protecting base stations in mobile telephone systems as well as extensive cable television (CATV) networks with their repeaters and distribution systems.

These protective components are also indispensable in other sectors, In AC power transmission systems, they are often used with current-limiting varistors, In customer premises equipment such as DSL modems, WLAN routers, TV sets and cable modems In air-conditioning equipment, the integral black-box concept offers graduated protection by combining arresters with varistors, PTC, diodes and inductor.

Features:

- Non-Radioactive
- RoHS compliant
- Low insertion loss
- Excellent response to fast rising transients
- Ultra low capacitance
- 5KA surge capability tested with 8/20 μ s pulse as defined by IEC 61000-4-5

Device Dimensions (Unit: mm)

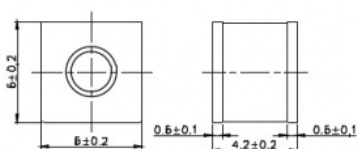

Recommended pad outline



+8618126201429



sylvia@socay.com



socaydiode.com

4/F, Block C, HeHengXing Science & Technology Park, 19 MinQing Road, LongHua District, Shenzhen City,
GuangDong Province, China