



SOCAY 30KPA90CA 30000W TVS Diodes 84V 5000μA For Medical Equipment

Our Product Introduction

Basic Information

- Place of Origin: Shenzhen, Guangdong, China
- Brand Name: SOCAY
- Certification: UL, REACH, RoHS, ISO
- Model Number: 30KPA90CA
- Minimum Order Quantity: 250PCS
- Price: Negotiable
- Delivery Time: 5-8 work days



Product Specification

- Product Name: TVS Diodes
- Package Type: R6/P600
- Feature: Protection Device
- Vrwm: 84V
- Vbr@It (Min.): 93.8V
- It: 50mA
- Vc@Ipp: 55.2V
- Ipp: 139.2A
- Ir@Vrwm: 5000μA
- Highlight: **30000W TVS Diodes, SOCAY TVS Diodes, 30KPA90CA**

for more products please visit us on socaydiode.com

Product Description

SOCAY 30KPA90CA 30000W TVS Diodes 30KP series datasheet for medical equipment

DATASHEET: [30KPA.pdf](#)

Classification

DIP:D0-41,DO-15,DO-201,P600

SMD:SOD-123(SMF),DO-214AC(SMA),DO-214AA(SMB),DO-214AB(SMC)

power:200W~30000W

Response time 1PS,With clamping voltage, voltage limiting element

Selection methods

- 1.To know the customer's product, operating voltage, application port, protection level.
- 2.VRWM (operating voltage) value of the device $\geq$ normal operation in the customer's circuit
- 3.VC (clamp voltage) value < maximum voltage for the back-end chip
- 4.Select the package and power of the device according to the application port and protection level.

Description:

The 30KPA series is designed specifically to protect sensitive electronic equipment from voltage transients induced by lightning and other transient voltage events.

Part Number		Reverse Stand-Off Voltage V_{RWM} (V)	Breakdown Voltage V_{BR} (V) @ I_T	Test Current I_T (mA)	Maximum Clamping Voltage V_C @ I_{PP} (V)	Maximum Peak Pulse Current I_{PP} (A)	Maximum Reverse Leakage I_R @ V_{RWM} (μ A)
Uni	Bi	MIN					
30KPA28A	30KPA28CA	28	31.28	50	50.0	606.0	5000
30KPA30A	30KPA30CA	30	33.51	50	55.2	548.9	5000
30KPA33A	30KPA33CA	33	36.90	50	58.5	517.9	5000
30KPA36A	30KPA36CA	36	40.20	50	61.8	490.3	5000
30KPA39A	30KPA39CA	39	43.60	20	67.2	450.9	2000
30KPA42A	30KPA42CA	42	46.90	10	72.0	420.8	1000
30KPA43A	30KPA43CA	43	48.00	10	73.0	415.1	1000
30KPA45A	30KPA45CA	45	50.30	5	77.4	391.5	250
30KPA48A	30KPA48CA	48	53.60	5	81.6	371.3	150
30KPA51A	30KPA51CA	51	57.00	5	86.4	350.7	50
30KPA54A	30KPA54CA	54	60.30	5	91.4	331.5	20
30KPA58A	30KPA58CA	58	64.80	5	92.4	327.9	20
30KPA60A	30KPA60CA	60	67.00	5	102.0	297.1	15
30KPA64A	30KPA64CA	64	71.50	5	104.0	291.3	10
30KPA66A	30KPA66CA	66	73.70	5	107.0	283.2	2
30KPA70A	30KPA70CA	70	78.20	5	109.0	278.0	2
30KPA71A	30KPA71CA	71	79.30	5	111.5	271.7	2
30KPA72A	30KPA72CA	72	80.40	5	114.0	265.8	2
30KPA75A	30KPA75CA	75	83.80	5	119.4	253.8	2
30KPA78A	30KPA78CA	78	87.10	5	129.0	234.9	2
30KPA84A	30KPA84CA	84	93.80	5	139.2	217.7	2
30KPA90A	30KPA90CA	90	100.50	5	146.4	207.0	2
30KPA96A	30KPA96CA	96	107.20	5	156.0	194.2	2
30KPA102A	30KPA102CA	102	113.90	5	165.6	183.0	2
30KPA108A	30KPA108CA	108	120.60	5	175.2	172.9	2
30KPA120A	30KPA120CA	120	134.00	5	194.4	155.9	2
30KPA132A	30KPA132CA	132	147.40	5	213.0	142.3	2
30KPA144A	30KPA144CA	144	160.80	5	223.2	135.8	2
30KPA150A	30KPA150CA	150	167.60	5	233.4	129.8	2
30KPA156A	30KPA156CA	156	174.30	5	245.0	123.7	2
30KPA160A	30KPA160CA	160	178.70	5	252.6	120.0	2
30KPA168A	30KPA168CA	168	187.70	5	272.4	111.2	2
30KPA170A	30KPA170CA	170	189.90	5	275.0	110.2	2
30KPA180A	30KPA180CA	180	201.10	5	290.4	104.3	2
30KPA198A	30KPA198CA	198	221.20	5	319.8	94.7	2
30KPA216A	30KPA216CA	216	241.30	5	348.6	86.9	2
30KPA240A	30KPA240CA	240	268.10	5	387.0	78.3	2
30KPA258A	30KPA258CA	258	188.20	5	416.4	72.8	2
30KPA260A	30KPA260CA	260	290.40	5	416.0	72.8	2
30KPA270A	30KPA270CA	270	301.60	5	436.2	69.5	2
30KPA280A	30KPA280CA	280	312.80	5	464.0	65.3	2
30KPA288A	30KPA288CA	288	321.70	5	469.9	64.5	2

Applications:


Small power supply protection, Switches, POS machines, Lightning arresters, Building intercoms, Monitoring systems, Parking cards

Parameter	Symbol	Value	Unit
Peak Pulse Power Dissipation with a 10/1000 μ s waveform (Fig.1)(Note 1), (Note 2)	P_{PPM}	30000	Watts
Peak Pulse Current with a 10/1000 μ s waveform.(Note1, Fig.3)	I_{PP}	See Next Table	Amps
Power Dissipation on Infinite Heat Sink at $T_L=75^\circ\text{C}$	$P_{M(AV)}$	8.0	Watt
Peak Forward Surge Current, 8.3ms Single Half Sine Wave (Note 3)	I_{FSM}	500	Amps
Operating junction and Storage Temperature Range.	T_J, T_{STG}	-55 to +150	$^\circ\text{C}$

Notes:

1. Non-repetitive current pulse, per Fig. 3 and derated above $T_A = 25^\circ\text{C}$ per Fig. 2.
2. Mounted on 5.0mm x 5.0mm (0.03mm thick) Copper Pads to each terminal.
3. 8.3ms single half sine-wave, or equivalent square wave, Duty cycle = 4 pulses per minutes maximum.
4. $V_F < 3.5\text{V}$ for $V_{BR} < 200\text{V}$ and $V_F < 6.5\text{V}$ for $V_{BR} > 201\text{V}$.

Functional Diagram

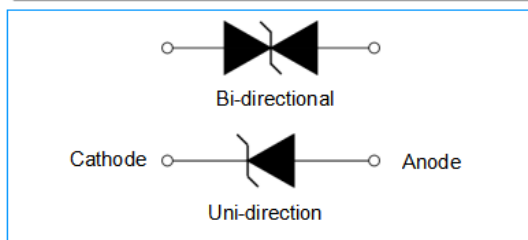

Ratings and Characteristic Curves ($T_A=25^\circ\text{C}$ unless otherwise noted)

Figure 1 - Peak Pulse Power Rating Curve

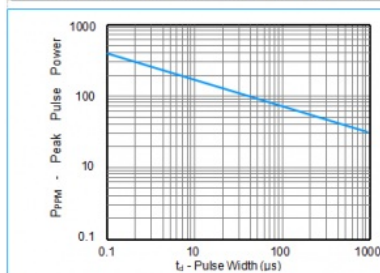


Figure 2 - Pulse Derating Curve

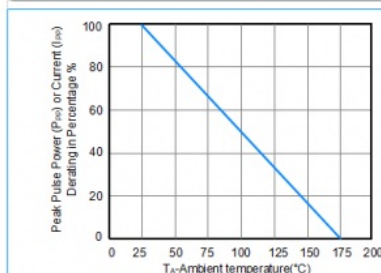


Figure 3 - Pulse Waveform

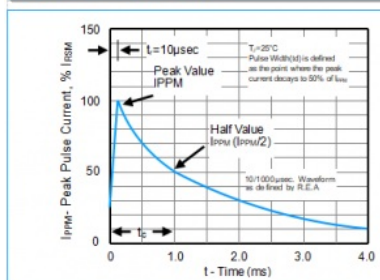


Figure 4 - Typical Junction Capacitance

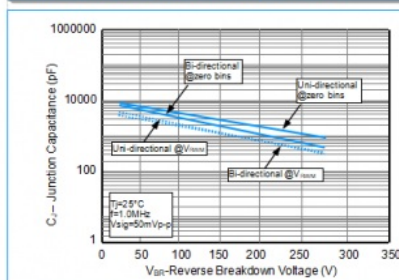


Figure 5 - Steady State Power Derating Curve




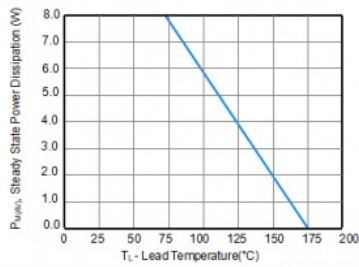


Figure 6 - Maximum Non-Repetitive Surge Current

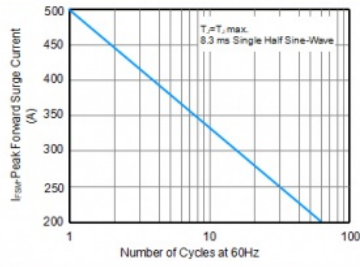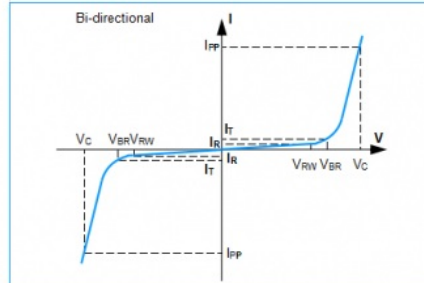

I-V Curve Characteristics

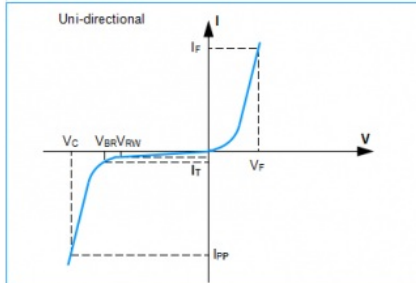


Physical Specifications

Weight	0.07 ounce, 2.1 gram
Case	JEDEC R-6/P600 Molded Plastic over glass passivated junction
Polarity	Color band denotes cathode except Bipolar
Terminal	Matte Tin-plated leads, Solderable per JESD22-B102D

Environmental Specifications


Temperature Cycle	JESD22-A104
Pressure Cooker	JESD22-A102
High Temp. Storage	JESD22-A103
HTRB	JESD22-A108
Thermal Shock	JESD22-A106

Soldering Parameters

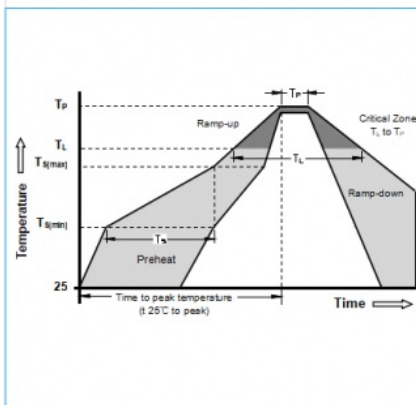

Reflow Condition	Lead-free assembly
Pre Heat	-Temperature Min (Tj(min)) 150°C
	-Temperature Max (Tj(max)) 200°C
	-Time (min to max) (Td) 60 - 180 Seconds
Average ramp up rate (Liquidus Temp TL) to peak	3°C/second max
Tj(max) to TL - Ramp-up Rate	3°C/second max
Reflow	-Temperature (TL) (Liquidus) 217°C
	-Time (min to max) (Td) 60 - 150 Seconds
Peak Temperature (Tp)	260 +0/-5°C
Time within 5°C of actual peak Temperature (tp)	20 - 40 Seconds
Ramp-down Rate	6°C/second max
Time 25°C to peak Temperature (Tp)	8 minutes Max
Do not exceed	280°C

Dimensions

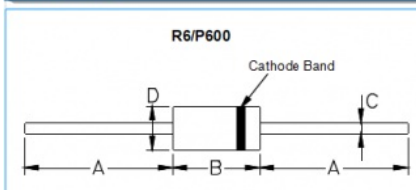



Dimensions	Inches		Millimeters	
	Min	Max	Min	Max
A	1.000	-	25.40	-
B	0.340	0.360	8.64	9.14
C	0.048	0.052	1.22	1.32
D	0.340	0.360	8.64	9.14

Part Numbering

30 KPAxxxCA	
5% VBR VOLTAGE TOLERANCE	
BI-DIRECTIONAL	
VBR VOLTAGE	
SERIES	

Part Marking

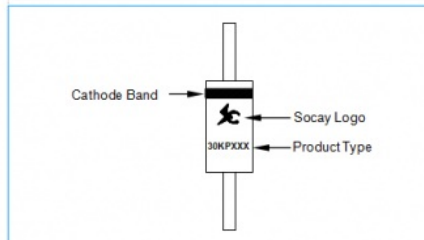

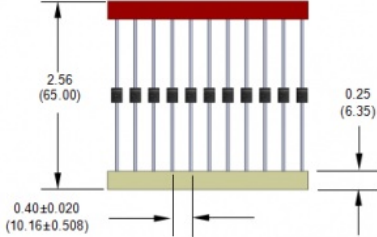Packaging			
Part Number	Component Package	Quantity	Packaging Option
30KPAXXXX	R6/P600	250 pcs	Box
Packaging Dimensions Unit: Inches (Millimeters)			
			

FAQ

Q1. Can I have a sample order ?

A: Yes, we welcome sample order to test and check quality. Mixed samples are acceptable.

Q2. What about the lead time?

A: Sample needs 1 days, mass production time needs 1-2 weeks for order quantity more than

Q3. Do you have any MOQ ?

A: MOQ depend on the type of product, 1pc for sample checking is available

Q4. How do you ship the goods and how long does it take to arrive?

A: We usually ship by DHL, UPS, FedEx or TNT. It usually takes 3-5 days to arrive. Airline and sea shipping also optional.

Q5. How to proceed an order ?

A: Firstly let us know your requirements or application.

Secondly We quote according to your requirements or our suggestions.

Thirdly customer confirms the samples and places deposit for formal order.

Fourthly We arrange the production.

Q6: Do you offer guarantee for the products?

A: Yes, we offer 2-5 years warranty to our products.

 **SOCAY® Shenzhen Socay Electronics Co., Ltd.**



+8618126201429



sylvia@socay.com



socaydiode.com

4/F, Block C, HeHengXing Science & Technology Park, 19 MinQing Road, LongHua District, Shenzhen City,
GuangDong Province, China