



SOCAY Power NTC Thermistor MF72-SCN2.5D-13 2.5Ω I_{max} Wide Resistance Range

Our Product Introduction

for more products please visit us on socaydiode.com

Basic Information

- Place of Origin: Shenzhen, Guangdong, China
- Brand Name: SOCAY
- Certification: UL, REACH, RoHS, ISO
- Model Number: MF72-SCN2.5D-13
- Minimum Order Quantity: 1000PCS
- Price: Negotiable
- Delivery Time: 5-8 work days



Product Specification

- Product Name: NTC Thermistor
- Package Type: Φ13mm
- NTC R25: 2.5Ω
- I_{max}: 6A
- Resistance Under Load: 88mΩ
- δ: 13mW/
- τ: 60 Secs.
- Capacitance: 330μF



More Images



Product Description**SOCAY Power NTC Thermistor MF72-SCN2.5D-13 2.5Ω I_{max} Wide Resistance Range****DATASHEET:** [MF72-SCN2.5D-13_v2105.1.pdf](#)**Electrical Characteristics**

Part Number	Resistance at 25 ±20%	Max. Permissible Working Current	Resistance under Load (mΩ)	Dissipation Factor	Thermal Time Constant	Maximum permissible capacitance @240Vac
	R25(Ω)	I _{max} (A)	(mΩ)	δ(mW/)	τ(Sec.)	C(μF)
MF72-SCN2.5D-13	2.5	6	88	13	60	330

Classification

RoHS & Halogen Free (HF) compliant
 Body size: Φ13mm
 Radial lead resin coated
 High power rating
 Wide resistance range
 Cost effective
 Operating temperature range: -40~+200
 Agency recognition: UL /cUL/RoHS

Applications:

Switch mode power supply
 Electric motor
 Transformer
 Adapter
 Projector
 Halogen lamp
 LED driver circuit

Storage Conditions of Products:

Storage Conditions:
 Storage Temperature: -10 ~ +40 .
 Relative Humidity: ≤ 75%RH.
 Keep away from corrosive atmosphere and sunlight.


Period of Storage: 1 year

Part Number Code


MF72	SCN	2.5D	-	13
(1)	(2)	(3)		(4)

- (1) MF72: MF72 Series.
 (2) SCN: Socay NTC.
 (3) 2.5D: Zero Power Resistance at 25 (R25): 2.5=2.5Ω.
 (4) Body Size: 13=Φ13mm.

Maximum Power Rating (Pmax)

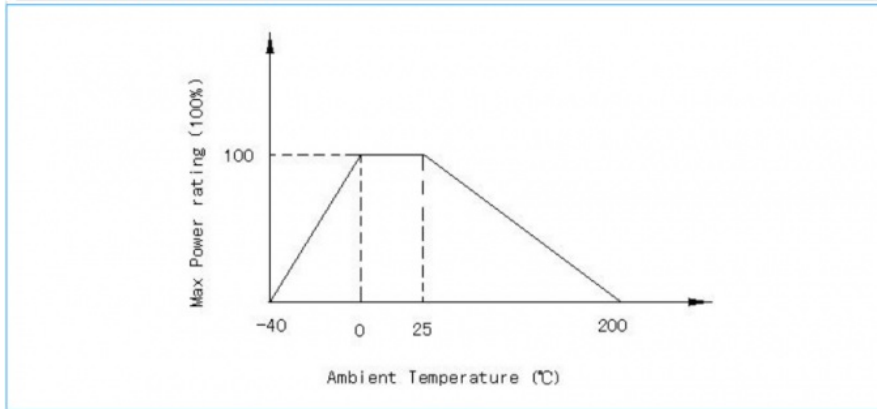

Structure and Dimensions (Unit: mm)

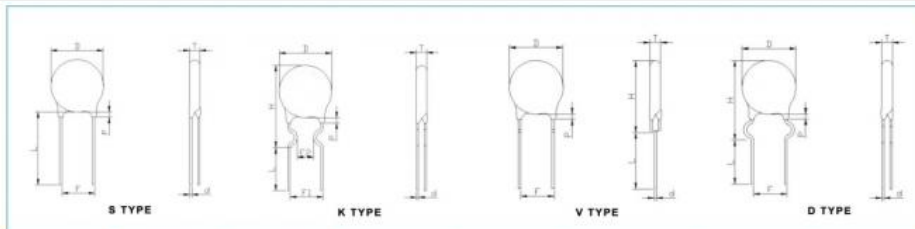

D max	T max	P max	F	H	Lshort/Llong	d	Type
14.5	5.5	3.0	7.5±0.5	—	7±1/20±1	0.75	S
14.5	5.5	3.0	7.5±0.5	20.5±1	4±1/20±1	0.75	K/V/D

Note: Length of Pin (L) can be customized.

Packing Specification

Part Number	Type of L	Quantity (pcs/bag)
MF72-SCN10D-11	Lshort	250
	Llong	250

Reliability


Item	Test conditions / Methods	Test Result
Tensile Strength of Terminals	Fasten body with a Load Applied to each lead 3.0Kg for 1sec.	No break out and damage
Bending Strength of Terminals	Fixed body hand 1.0kg on one terminal bend 90 then back again oppsite.	No break out and damage
Solder Ability	When the Lead wire was dipped into bath of 235 ± 5 for 3 seconds after immersion in 25% rosin flux the solder ability ratio of lead wire surface should more than 95%.	More than 95% solder ability
Temp. Cycle Test	(-40 × → +25 × 3min) × 5Cycles (-85 × → +25 × 3min) × 5Cycles	ΔR/R ≤ ±20 %
Humidity Test	45 95%RH×1000 hours	ΔR/R ≤ ±20 %
Load Life	6 AMP×1000 hours	ΔR/R ≤ ±20 %
Insulation Test	DC 700V	R≥500MΩ

Company Profile

We are manufacturer and supplier with over 20 years experience for passive components as below

- 1- ESD
- 2- TVS Diodes
- 3- PPTC Resettable Fuse
- 4- Gas Discharge Tube
- 5- NTC Thermistor
- 6- Varistor, etc.



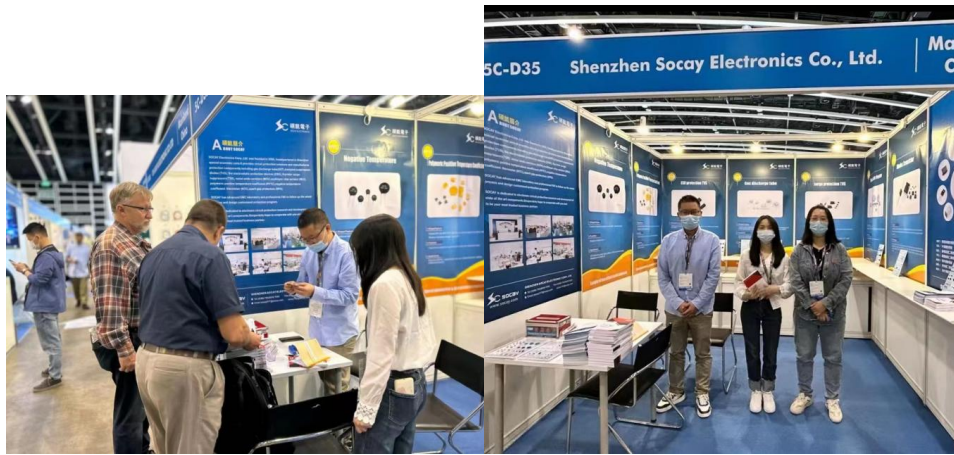

FAQ

Q: May we get some samples?

A: Of course, samples are available.

Q: What is product lead time?

A: For GDT, TVS and ESD, lead time will take 1-2 weeks. For TSS, MOV, MLV, NTC, and PPTC, lead time will take 2-3 weeks. Accurate lead time will be further confirmed when we know your specific requirement.

Q: Do you support customization?

A: Yes, we do.

Please feel free to contact us if you have any question.

Contact Person: Aria Wei

Tel/WhatsApp/Wechat/Skype: +8615778830733

Email Address: sc72@socay.com

Website: www.socay.com / www.socay.en.alibaba.com

Address: Floor 4, Building C, Hengxing Science park, No.19 Minqing Road, Longhua District, Shenzhen

 **SOCAY® Shenzhen Socay Electronics Co., Ltd.**

 +8618126201429

 sylvia@socay.com

 socaydiode.com

4/F, Block C, HeHengXing Science & Technology Park, 19 MinQing Road, LongHua District, Shenzhen City,
GuangDong Province, China