



## SC-10KVC-277 Surge Protection Device SPG Operating Voltage 220Vac 10kV Vn

Our Product Introduction

### Basic Information

- Place of Origin: Shenzhen, Guangdong, China
- Brand Name: SOCAY
- Certification: UL, REACH, RoHS, ISO
- Model Number: SC-10KVC-277
- Minimum Order Quantity: 270PCS
- Price: Negotiable
- Delivery Time: 5-8 work days



### Product Specification

- Product Name: Surge Protective Devices (SPD)
- Size: 35×26×14mm
- Rated Operating Voltage: 220VAC
- Max. Continuous Voltage: 277VAC
- Response Time: 25ns
- Cross-section Area: 1mm<sup>2</sup>
- Vn: 10kV
- Vmax: 20kV
- L-N/PE: 1.2kV
- N-PE: 1.1kV
- Highlight: Surge Protection Device SPG,  
Surge Protection Device 10kV



for more products please visit us on [socaydiode.com](http://socaydiode.com)

## Product Description


SPG SC-10KVC-277 Surge Protection Device, Operating Voltage 220Vac, for Roadway Lighting

**DATASHEET:** [SC-10KVC-277\\_v2209.1.pdf](#)

Symbol	Parameter	Value	Unit
Electrical Parameters	Rated Operating Voltage	220	VAC
	Max. Continuous Voltage	277	VAC
	Response Time	25	ns
	Cross-section Area	1	mm <sup>2</sup>
Surge Parameters	Nominal Discharge Voltage (1.2/50μs) (Vn)	10	kV
	Maximum Discharge Voltage (1.2/50μs) (Vmax)	20	kV
Voltage Protection Level (Up)	L-N/PE	1.2	kV
	N-PE	1.1	kV

Notes:

1. Nominal discharge voltage surge times:  $\pm 15T$ ;
2. Maximum discharge voltage surge times:  $1T$ .

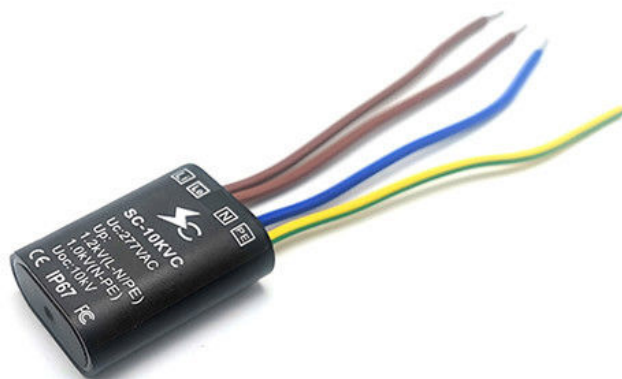

### Description:

SC-10KVC-277 is a kind of power supply surge protector suitable for 220V power grid. Used in street lighting, landscape lighting, etc. The shell of the product is made of flame-retardant material, and the product is made of potting glue. It has the characteristics of fire prevention, waterproof and dustproof. Protection grade up to IP67. Installation and application is very convenient, with L, N and PE connection line.

### Features:

- u The product has full mold protection function. The product has a maximum protection can withstand the impact of 10kV surge voltage.
- u The size of the product is small, 35×26×14mm (excluding the connecting wire).
- u It is a Class III power SPD.
- u Can use series, parallel connection mode, flexible and convenient.
- u Adopt our company's new structure technology manufacturing, break through the conventional structure technology. This process can improve the impact resistance of SPD.
- u Executive standard: IEC/EN:61643-11.
- u Operating Temperature Range: -40 to +85 .

#### Applications:

Outdoor and Commercial LED Lighting.  
Roadway lighting.  
Traffic lighting.  
Digital signage.  
Security power supply.  
Wash wall lighting.  
Parking garage lighting.  
Flood lighting.  
Tunnel lighting.

#### Application / Installation Schematic

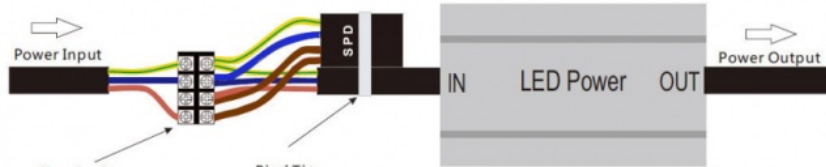


Figure 1. Installation Schematic


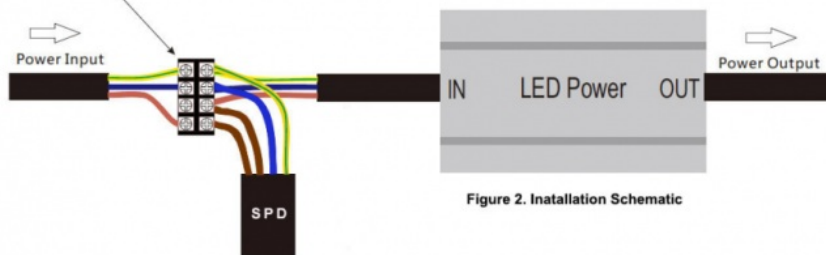


Figure 2. Installation Schematic

#### Notes:

1. The brown wire is Li/Lo wire, Li is the input and Lo is the output, the blue wire is N wire, and the yellow-green wire is the ground wire.
2. After the wire is installed, the product can be tied to the power supply with cable ties. Due to the small volume and weight of the product, it can also be placed freely as shown in Figure 2 of the installation example.

#### Typical Dimensions

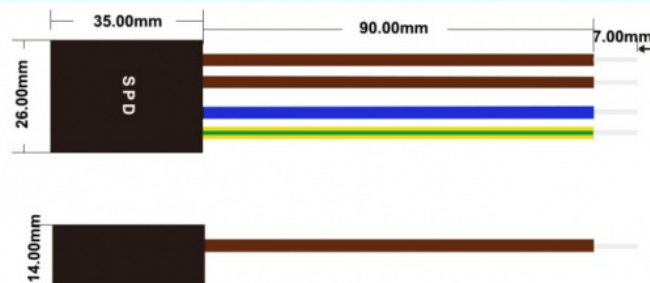

Part Number	Quantity
SC-10KVC-277	270 PCS / Box

 **SOCAY® Shenzhen Socay Electronics Co., Ltd.**

+8618126201429

sylvia@socay.com

socaydiode.com

4/F, Block C, HeHengXing Science & Technology Park, 19 MinQing Road, LongHua District, Shenzhen City,  
GuangDong Province, China